





WORLD'S NO. 1 SEWING BRAND!



Brand Legacy

Established in the year 1851 by Sir Isaac Merritt Singer, 'Singer Sewing Machine Company' has been a pioneer in manufacturing and selling sewing machines for 170 years. Brand has achieved a significant leve of global reach and recognition in over 100 countries. The company created its foothold in India in the year 1871 and has since been synonymous with sewing and stitching across the country. While continuing its glorious journey, the company was acquired by "Indian Sewing Machine Company Limited" in the year 1977. The company was later renamed as "Singer India Limited", as we know it today, with its headquarters in New Delhi. Singer India has its manufacturing facilities in Jammu in the state of Jammu and Kashmir in India.

Overview

An ISO 9001:2015 certified company; Singer India Limited (SIL) has two major business segments - Sewing Products, Home & Kitchen appliances. Sewing products are marketed under the brand "Singer" & "Merritt". Sewing products include zig-zag fashion maker, hi speed industrial sewing machine, straight stitch machines, artisan & sewing accessories. Our range of home & kitchen appliances span across washing machines, room coolers, refrigerators, fans, water heaters, food processors, dry and steam irons, mixer grinders, sandwich makers, toasters, hand blenders, etc.

The company has showrooms, distribution networks and a robust after sales service network Pan India.

Brand Singer is the world's no 1 sewing brand and also has been recently selected and awarded with "INDIA'S MOST TRUSTED SEWING MACHINE BRAND" by Brand Trust Report 2023.

Add #MoreTolife with Singer.

■ SINGLE NEEDLE LOCK STITCH MACHINE







S11

- 1 Intelligent system, Easy to learn, Easy to use
- 2 High speed, low noise
- 3 Beautiful exterior, high quality parts

	→/←	<u>-</u> -	<u></u>	Ĺ	M	Q spm	Ŋ	\rightleftharpoons	X	<u> </u>
S11-D1	DBX1/9-16	5	5-13	*	*	5000	_	_	_	_
S11-D2	DBX1/9-16	5	5-13	*	*	5000	_		*	
S11-D3	DBX1/9-16	5	5-13	*	*	5000	*	*	*	
S11-D4	DBX1/9-16	5	5-13	*	*	5000	*	*	*	*







9900 | 9900H

- 1 Intelligent system, Easy to learn, Easy to use
- 2 High speed, low noise
- 3 Beautiful exterior, high quality parts

	→/←	<u></u>	<u> 7</u>		H	Ŋ	\rightleftharpoons	X	<u> </u>
9900	DBX1#14	5	5-13	* *	5000	_	_	_	_
9900H	DBX5#21	7	5-13	*	* 3500	_	_		

SINGLE NEEDLE LOCK STITCH MACHINE







9900T

- 1 Intelligent system, Easy to learn, Easy to use
- 2 High speed, low noise
- 3 Beautiful exterior, high quality parts









SRS

- 1 Beautiful exterior, high quality parts
- 2 Intelligent and high efficiency
- 3 High speed, low noise
- 4 LED touch screen with working breathing light and voice navigation
- 5 Advanced self-adaptive intelligent operation mode, which automatically shields the useless function button

	→/←	1	<u></u>	L	M	H	Q	Ŋ	\rightleftharpoons	X	=
S RS-3	DBX1/9-16	5	5-13	*	*	_	5000	*	*	*	_
S RS-4	DBX1/9-16	5	5-13	*	*	_	5000	*	*	*	*
S RS-3H	DPX5/18-24	7	5-13	_	*	*	4000	*	*	*	_
S RS-4H	DPX5/18-24	7	5-13	_	*	*	4000	*	*	*	*







S-N21

- 1 Environment friendly design with air purify system
- 2 Intelligent and high efficiency
- 3 High speed, low noise
- 4 Energy-saving, accurate control

<u> </u>	ļ	Ļ	→ ↓	Π	. D	<u> </u>	• •	<u>‡</u>	Spm
S N21-4D	2	4	DCX27/9-11	2	4	3.8	0.7-2	5.5	6500
S N21-4DJ	2	4	DCX27/9-11	2	4	3.8	0.7-2	5.5	6500
S N21-4DT	2	4	DCX27/9-11	2	4	3.8	0.7-2	5.5	6500
S N21-4A	2	4	DCX27/9-11	2	4	3.8	0.7-2	5.5	6500
S N21-4AC	2	4	DCX27/9-11	2	4	3.8	0.7-2	5.5	6500
S N21-4AB	2	4	DCX27/9-11	2	4	3.8	0.7-2	7	6500







S-8140 | S-8150

- 1 Environment friendly design
- 2 Intelligent and high efficiency
- 3 High speed, low noise
- 4 Energy-saving, accurate control

	ļ	Ţ	→/←	Щ	: DE		• •	<u> </u>	Q spm
S-8140	2	4	DCX27/9-11	2	4	4.2	0.7-2	5.5	6000
S-8150	2	5	DCX27	3	5	3.8	0.7-2	5.5	6000







SF7

- 1 Intelligent and high efficiency
- 2 High speed, low noise
- 3 Energy-saving, accurate control
- 4 Improved sewing experience

	ļ	Ţ	→ ←	Π	1,000	\(\sqrt{200} \)	• •		Spm
S F7-4D	2	4	DCX27/9-11	2	5	3.8	0.7-2	5.5	5500
S F7-4DJ	2	4	DCX27/9-11	2	5	3.8	0.7-2	5.5	5500
S F7-4QD	2	4	DCX27/9-11	2	5	3.8	0.7-2	5.5	5500







- 1 Multifunctional LCD touch screen
- 2 Fast transmission by USB
- 3 Closed-loop system accurate control to make the pattern beatiful
- 4 Auto trimmer short thread, no need man-work trim steps

<u> </u>	-↓	並	(L)	M	\oplus			1	₹ <u>₹</u>	Ų.	₩
FL-9820	2500	DOX558Nm100 11#-14#	*	*	_	5-50	12-16	22	12-16	170/120	106X75X115
FL-9820-1	2500	DOX558Nm100 11# - 14#	*	*	_	5-50	12-16	22	12-16	170/120	106X75X115

■ SINGLE NEEDLE LOCKSTITCH WITH WALKING FOOT HEAVY DUTY







S-0303D

- 1 Intelligent and high efficiency
- 2 High speed, low noise
- 3 Improved feeding constructure, improved feeding ability

<u> =</u>	1.	业	₹	H	Õ	MAKE.
S-0303D	DPX17/20-23	8	7-13	*	2500	*

COMPUTERISED BAR-TACKING MACHINE





- 1 Intelligent system high speed high efficiency
- 2 Lubrication design to the gear extends the machine life and decreases the noise
- 3 New thread trimmer mechanism design makes the trimming more stable and smooth
- 4 Advanced closed-loop control system, easy operation



■ COMPUTERISED BUTTON HOLE MACHINE







- 1 Multifunctional LCD touch screen
- 2 Closed-loop systems accurate control to make the pattern beautiful
- 3 New thread trimmer mechanism
- 4 Intelligent multiple knife dropping function









- 1 Environmental friendly
- 2 Lower noise, ultra-low vibration and durability
- 3 Suitable for heavy and light materials, excellent sewing effect Advanced closed-loop control system, easy operation

	\bowtie	ı		Ţ	Π	<u> </u>		<u>∓</u>	Q *pm
S 500D-01	Direct drive plain seaming	UY128GAS 11#	2/3	4/5	3.2/4.8/5.6/6.4	1.5-4.4	0.5-1.3	5.5	6000
S 500D-07	Direct drive auto trimmer	UY128GAS 11#	2/3	4/5	3.2/4.8/5.6/6.4	1.5-4.4	0.5-1.3	5.5	6000
S 500A-01	Cam Outward	UY128GAS 11#	2/3	4/5	3.2/4.8/5.6/6.4	1.5-4.4	0.5-1.3	5.5	6000







- 1 Intelligent system, Easy to learn, Easy to use
- 2 High speed, low noise
- 3 High quality parts



COMPUTERISED BUTTON ATTACHING







- 1 Intelligent system high speed high efficiency
- 2 Lubrication design to the gear extends the machine life and decreases the noise
- 3 New thread trimmer design makes the trimming more stable and smooth

		Ö	;	<u> </u>	MM.	00
S 1903D	DPX17 14#	2700rpm	Φ8~Φ 22 mm	0.1mm~10m	Max 13mm	Shuttle hook







S-842/S-845

Suitable for shirts, uniforms, jeans, coats or similar garments, strong adaptability to seam material. Suitable for high quality double stitch and decoration process.

<u> </u>	→		П		<u> </u>	⁷ ₹3	€			₩	<u>می</u> ک
S-842D	DPX5 11-16#	2	1/8"5/32"7/32"3/8" 1/4"5/18"1/2"	2	0-4	7-13	3500	*	_	675X310X660	43/48
S-845D	DPX5 11-21#		1/8"5/32"7/32"	3	0-7	7-13	3000			720X320X670	47/50








- 1 Lower noise, ultra-low vibration and durability
- 2 Multi-direction adjustable thread cutter ASM
- 3 Technical innovation super high speed sewing with excellent seam
 Advanced closed-loop control system, easy operation

	\bowtie	,		Ţ	Π	Ø8	**	<u>↓</u>	Õ
S 600B-08	Bottom Hemming	UY128GAS 11#	2/3	4/5	3.2/4.8/5.6/6.4	1.5-4.4	0.5-1.3	5.5	6000

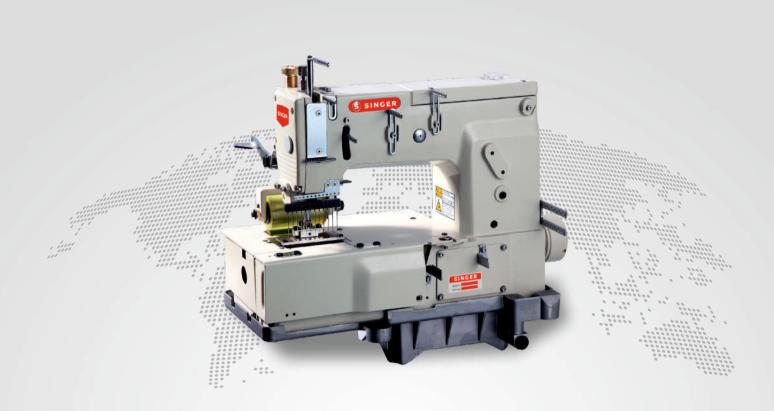





S-1412P

S-1412P series are used for attaching elastic, attaching waistband and sewing the front of shirts, attaching line tapes, smocking and shirring etc...

Which are ideal for underwear, lady's clothes, interior decorated goods (curtains, table-clothes etc...)

5	I	J.	±	Ţ	Ų	1000	Ü	₩	
S-141	P 12	UOX113	12	24	34	3.6	4500	620X405X590	48/52

COMPUTERISED ZIGZAG MACHINE







- 1 Double step motor enabling continuous sewing more complicated patterns at high speed
- 2 Adjustable to achieve straight seam, 2 to 4 point zigzag seam stitch effect
- 3 Pattern design function with more than 300POM patterns, could extend memory to 999 patterns Advanced closed-loop control system, easy operation

<u> = </u>	↓ _←	<u> </u>	₹	3	Ö	1	X	<u> </u>
S 2290 - SS	DPX5/11	5	5.5-10	10	5000	_	_	_
S 2290-SS-7P	DPX5/11	5	5.5-10	10	5000	_	*	*
S 2290-SR	DPX5/11	5	5.5-10	10	5000	*	_	
S 2290-SR-7P	DPX5/11	5	5.5-10	10	5000	*	*	*



S-450B

Product Features

- 1 S 450 Series machine is a hot melt adhesive pressurized continuous fusing machine, it has to prevent migraine with special properties suitable for fabric and fusible interlining of thermo-compression bonding purposes.
- 2 It has limit switch, automatic belt warping prevention by motor.

Application

It can be widely used in various non-flammable agents contain fabric collar, chest, cuffs, placket, waist top fabric and adhesive products smooth stiff and resistant to washing, easy trend, the dragon it applicable to all resins collar lining, non-woven adhesive liner.

MODEL	S-450(500)(600B)				
Max. Bonding Width	450X500/600mm				
Upper Belt Width X Length	450X1350/500X1350/600X1350mm				
Bottom Belt Width X Length	450X1650/500X1650/600X1650mm				
Operating Speed of Conveyer Belt	0 - 10m/min				
Bonding Temperature	≤190°C				
Electric Heating Power	5.2/5.2/6KW				
Power Supply	220V/1PH/50Hz				
Gross Weight	202/202/222kg				
Outline Dimension (LxWxH)	1965X973(1073)X1093mm				
Packing Dimension	1050(1050/1130)X955X730mm				







S-101D

Product Features

- 1) Direct drive motor: Equipped with direct-drive motor, can be directly driven responsively.
- 2 Sewing stitch: Single looper, arc pendulum method, single thread chain stitch.
- 3 Sewing mode: For adoption of blind stitch mode, the stitch is invisible from the surface of fabric, which maintain the clothes much neater and more elegant.
- 4 Extra device: Auto thread trimmer, auto orientation and auto presser foot lifter, greatly improve the working efficiency.

Application

Widely used for hemming cuffs, pants, shirts, gloves, socks, front and back of suits, etc. and suits various material such as cotton, wool, chemical fiber etc. (Treasure type)

<u> </u>	J	<u>#</u>	Ö	Motor Power
S 101D	LWX6T 9#11#14#	3.2-8.5	1800	220V/250W

■ SYMBOL SPECIFICATIONS I







Auto thread trimmer



Stitch width



Vertical hook (large)

Stitch width



Stitch length



Differential ratio



Horizontal hook (standard)



No.of needles



Straight line bartacking



Unison feed



Horizontal hook (large)



Needle



Thread wiper



Needle gauge



Light materials



No.of threads



Inner and outer foot lifter alternately



Shuttle hook



Medium materials



Auto Needle Thread Clamping



Thickness



Vertical hook (standard)



Heavy materials



Cylindrical diameter



Sewing speed



Sewing materials



Power



Needle stroke



Alternation range



Compound feed



Weight



Auto presser foot lift



Sewing area(mm)



Button size



Measurement



Split needle bar



Stitch length



No



#MoreToLife

FOR SALES ENQUIRY +91-8595215215

SINGER INDIA LIMITED

A26/4, 2nd Floor, Mohan Co-operative Industrial Estate, New Delhi - 110 044. (9 +91 9555390390

E-mail: mail@singerindia.com Follow us: 😝 🎯 💟 🖸









